

# PROCASTER

Broadcast Quality Dynamic Microphone

**RØDE**<sup>®</sup>  
MICROPHONES


## Features

- Broadcast quality sound
- High output dynamic capsule
- Balanced, low impedance output
- Internal shock mounting of capsule for low handling noise
- Internal pop-filter to reduce plosives
- Robust, all metal construction
- Designed and manufactured in Australia
- Full 10 year warranty\*


## Specifications

Acoustic Principle	Dynamic	Directional Pattern	Cardioid
Frequency Range	75Hz ~ 18,000Hz	Sensitivity	-56dB ±2dB re 1V/Pa @ 1kHz (1.6mV/Pa @ 94dB SPL)
Output Impedence	320Ω	Dimensions	Length - 214mm (8.425") Diameter - 53mm (2.086")
Output Connection	3 pin XLR, balanced output between Pin 2 (+), Pin 3 (-) and Pin 1 (ground)	Shipping Weight	1,100g
Net Weight	695g		

## Frequency Response

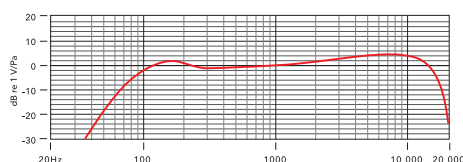

## Polar Pattern



## Included Accessories

- RM2 stand mount
- ZP1 zip pouch



[www.rodemic.com](http://www.rodemic.com)

\*After online registration

Australia  
107 Carnarvon st, Silverwater NSW 2128 Australia  
Ph: +61 2 9648 5855 Fx: +61 2 9648 2455

USA  
PO Box 4189 Santa Barbara CA 93140 USA  
Ph: +1 805 566 7777 Fx: +1 805 566 0071